



Datenblatt - Fiche technique - Data sheet



11.99.5603



VALUE DisplayPort Kabel, DP ST - ST, 3,0m

VALUE Câble DisplayPort, DP M - DP M, 3,0m

VALUE DisplayPort Cable, DP-DP, M/M, 3 m

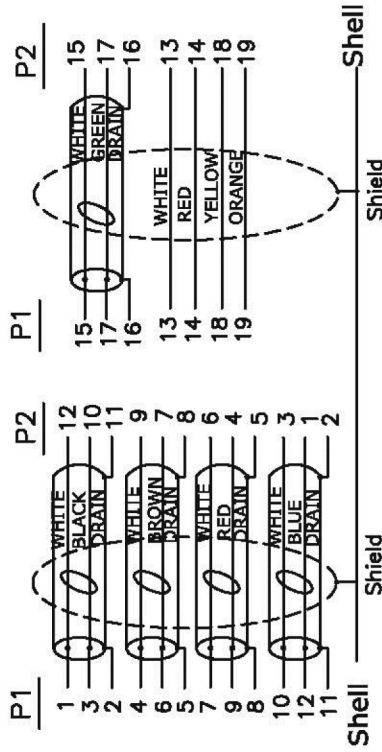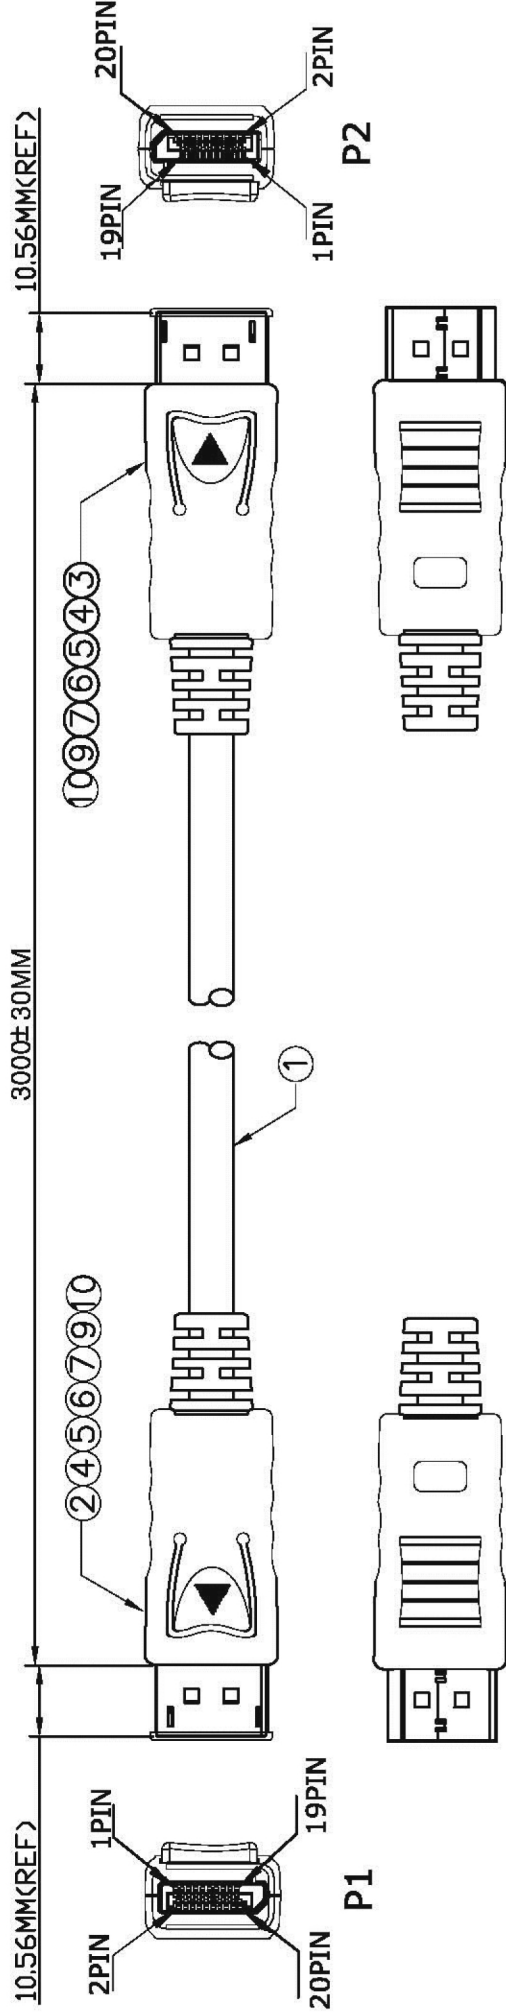

ELECTRICAL TEST:
 1.100% OPEN & SHORT & MIS WIRE TEST
 2.CONTACT RESISTANCE:2 OHM(MAX)
 3.INSULATION RESISTANCE:10M OHM(MIN)
 4.HI-POT TEST:DC 300V/10ms

NO	DESCRIPTION	Q'TY	UNIT
10	Inside Molding:PE	4	g
9	45P PVC COLOR:BLACK	10	g
8	H.S.T:Ø1.5*5mm.	10	pcs
7	H.S.T:Ø1.0*10mm.	10	pcs
6	H.S.T:Ø2.5*15mm.	10	pcs
5	DisplayPort TRANSPARENT DUST COVER	2	pcs
4	Display Port M ABS Up SHELL,COLOR:BLACK	2	pcs
3	Display Port M ABS Down SHELL,COLOR:BLACK	2	pcs
2	Display Port M INSULATION:BLACK,SHELL NICKEL,PIN GOLD	2	pcs
1	Display Port(7/0.127 TC*1PR+EMA)*5+7/0.127 TC*4C+F+AEB(16*10/0.10) OD:7.3±0.15MM Black	3	M
NO	DESCRIPTION	Q'TY	UNIT

REV.	DESCRIPTION	DATE
1		

rotronic	
VALUE DISPLAY PORT CABLE 20PIN M/M, BLACK, 3M	
CUSTOMER P/N : 11.99.5603	
SCALE	NONE
UNIT	MM
DATE	07.04/09
DRAWING NO.:	
REV. B	1/4